


Pin Type Fork Positioner for ITA/FEM Forks with integral sideshift: 698

compare to Cascade PFS-F series

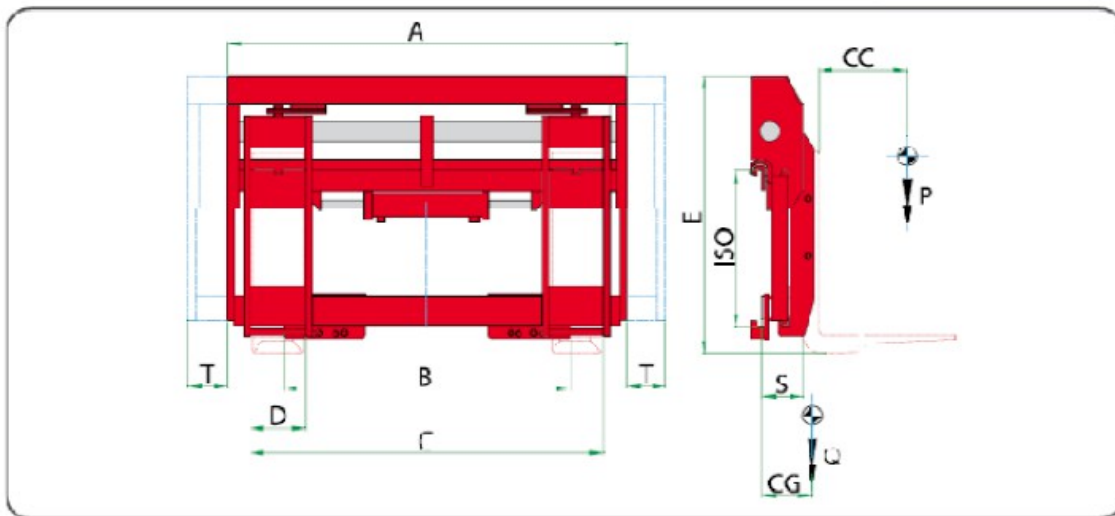

series 698

Pin Type Fork Positioner for ITA/FEM Forks with Integral sideshift

REFERENCE	CAPACITY P - Lb	LOAD CENTER CC - in	MFG CLASS	CARRIAGE WIDTH A - in	OPENING RANGE C MIN - in C MAX - in		EXTERNAL HOOKS B - in	POCKET WIDTH D - in	HEIGHT E - in	STROKE T - in	THICKNESS S - in	CENTER OF GRAVITY CG - in	WEIGHT Q - Lb
18HFA2C2009	5500	20"	II	38.5"	14.3"	34.4"	22"	5.7"	28.9"	± 3.9"	4.1"	2.1"	330
18HFA2C2010	5500	20"	II	41"	14.3"	36.8"	24.4"	5.7"	28.9"	± 3.9"	4.1"	2.1"	339
18HFA2C2011	5500	20"	II	45"	14.3"	41.1"	28.7"	5.7"	28.9"	± 3.9"	4.1"	2.2"	352
18HH23C2002	6610	20"	III	45"	16.7"	41.1"	28.7"	6.9"	32.9"	± 3.9"	4.9"	2.4"	430
18HLL3C2002	11020	20"	III	49"	17"	43.9"	32.7"	6.9"	32.9"	± 3.9"	4.9"	2.6"	498
18HLL3C2003	11020	20"	III	53"	17"	47.8"	36.6"	6.9"	32.9"	± 3.9"	4.9"	2.6"	513
18HLL3C2004	11020	20"	III	61"	17"	55.7"	44.5"	6.9"	32.9"	± 3.9"	4.9"	2.7"	557